



Durable and Reliable Feed Delivery.



A double boot, twin transition application for maximum versatility and delivery rate.



The Triple Upper Boot is designed to provide more feed to more flexible auger lines from one source. When used in conjunction with the double lower boot, up to six auger lines can run from a single feed bin!

Reliable Auger

- With auger manufactured by VAL-CO, in the U.S., the quality control is closely monitored both in-house and at the steel mill.
- High carbon steel is heat treated and tempered to proprietary specifications to ensure long auger life.
- Each batch of auger is microscopically inspected and vigorously tested before it can be approved for shipment.

Post-forming Proprietary Treatment

- VAL-CO developed an in-line secondary proprietary process to treat the surface of the auger, helping to ensure the auger does not crack.
- This process allows VAL-CO to be confident in standing behind the 10 year warranty (3 years outright, 7 years limited).

740 Systems - Extra High Volume

- The 740 System is our largest auger system available today, providing more than double the capacity of our 735 (High Volume) system!

FLEXIBLE AUGER OPTIONS

- LOW VOLUME 15 lb (6.8 kg) Per Minute
- PELLET AUGER 35 lb (15.9 kg) Per Minute
- STANDARD VOLUME 50 lb (22.7 kg) Per Minute
- HIGH MOISTURE 50 lb (22.7 kg) Per Minute
- HIGH VOLUME 100 lb (45 kg) Per Minute
- EXTRA HIGH VOLUME 220 lb (99.8 kg) Per Minute

Approximate feed delivery rate is based on 40 lbs./cubic foot feed density and 359 rpm drive unit.




Performance You Can Count On


Feed Delivery Components



Clear, green, double, & single transition options.

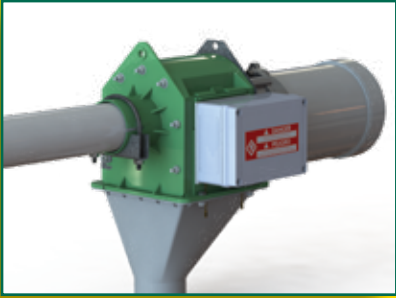

Poly or steel discharge heads with dependable mechanical or proximity backup sensors.

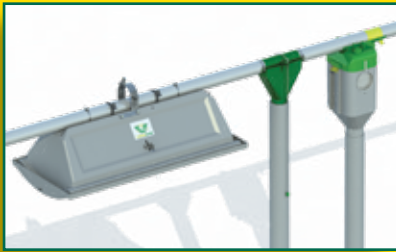

All-out-drops, volume drops, group drops, and more!



Engineered sensors for your application: level & safety switches, tube & hopper mounted.

Auger Tubing


Strong Tubes

- Auger tubes are made of dual layers with a harder, more durable inside and a UV protected outside for maximum longevity.
- Die-formed elbows ensure consistent thickness and tight tolerances.



VAL-CO put their auger tube to the test against leading competitors and won!

In replicated internal testing, the VAL-CO tube had up to 46% less weight loss after 40 hours of abrasive testing. VAL-CO tube is made from harder plastic and you can see the results in the samples below from a side-by-side test.

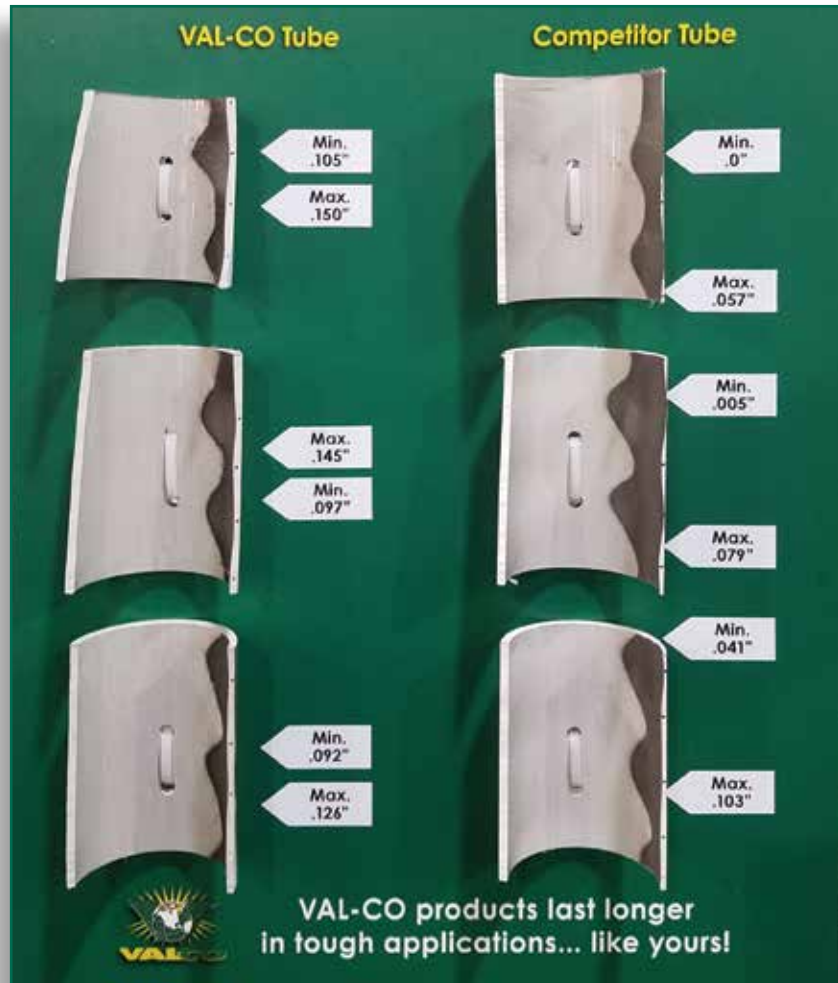

Call your local **VAL-CO** representative or distributor for more information on these and our other fine products.

North America:

Phone: 800-99VALCO (800-998-2526)

Fax: (+1) 419-678-2200

E-mail: sales@val-co.com

International:

Phone: (+1) 419-678-8731

Fax: (+1) 419-678-2200

E-mail: intl.sales@val-co.com



VALCO

Performance You Can Count On

www.val-co.com