




Quick Sheet Instructions

922313 CUST INST. SPRINKLER PWR 24VAC 120, 208/240VAC, 50/60HZ



Installation Instructions:

1. Open the enclosure 922310 and remove all the hardware bags from the box. You will find a bag containing four wire lever connectors (922312) and another bag with all the mounting hardware, a 1/2" grommet, and a 3/8" grommet. Discard the foam placed on top of the transformer.

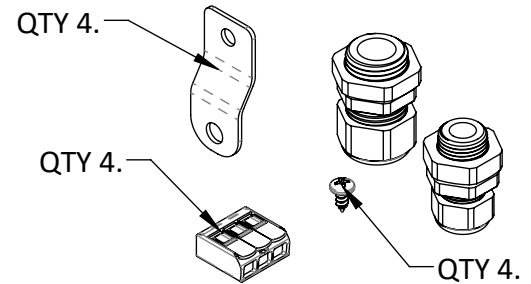

2. Use a step drill bit to make the holes as shown in the VIEW A. Drill a 13/16" hole on the left side of the box and a 5/8" hole on the right side (being careful not to drill into the transformer). Install grommets in the corresponding holes.

3. Install four brackets to the box using the provided enclosure hardware as shown on VIEW B then mount the enclosure in the desired location.

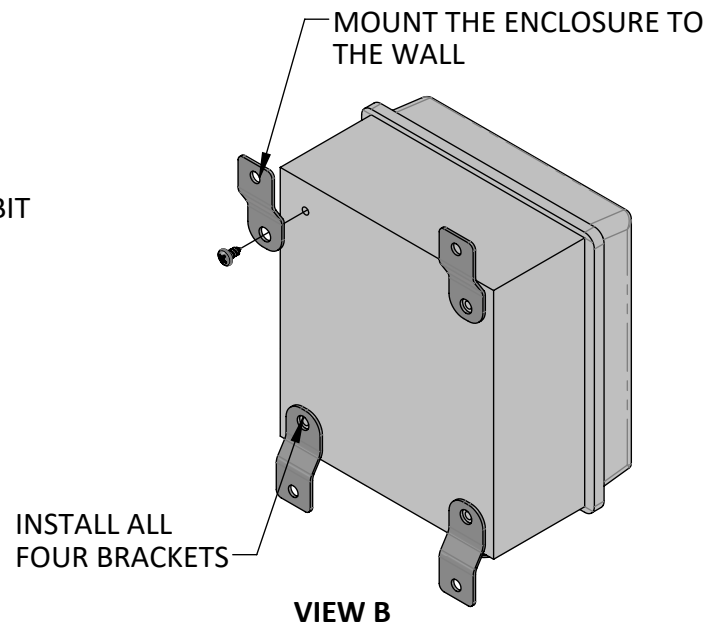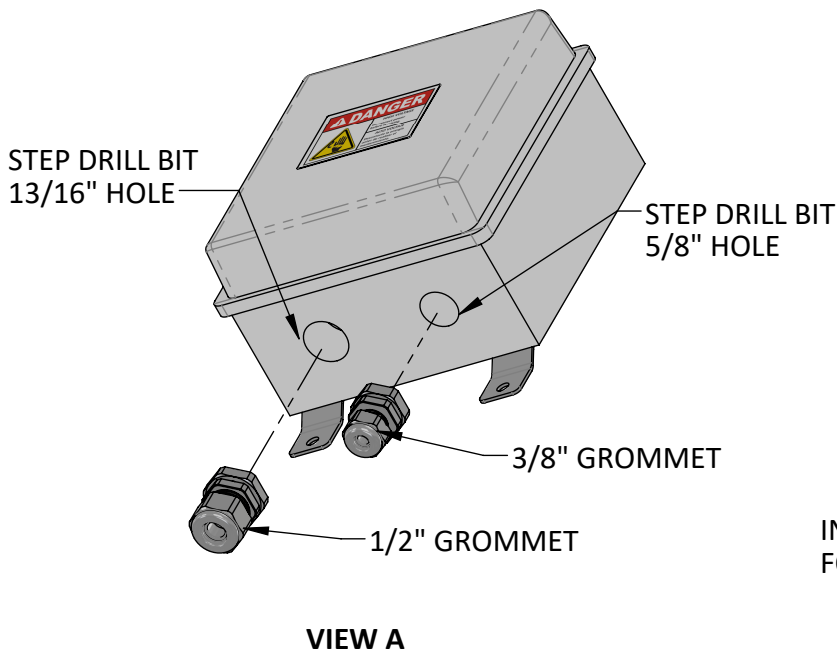


NOTICE! BEFORE DOING ANY ELECTRICAL WORK, MAKE SURE TO TURN OFF THE MAIN POWER BREAKER.

5. Run the incoming power line through the 1/2" grommet into the box, and run the load wiring through the 3/8" grommet into the box.

NOTICE! BEFORE DOING ANY ELECTRICAL WORK, MAKE SURE TO TURN OFF THE MAIN POWER BREAKER.

6. Connect the white wire from the transformer to the neutral wire from the facility power using a single-wire lever connector.
7. Connect the other transformer wire (based on the color code shown in the WIRING VIEW) to the hot incoming wire from the facility power using a single-wire lever connector.
8. Connect the 24v AC load to the blue and yellow wires from the transformer, using a separate wire lever connector for each wire.
9. Use electrical tape (not provided) to individually insulate each of the remaining bare unused wire ends.

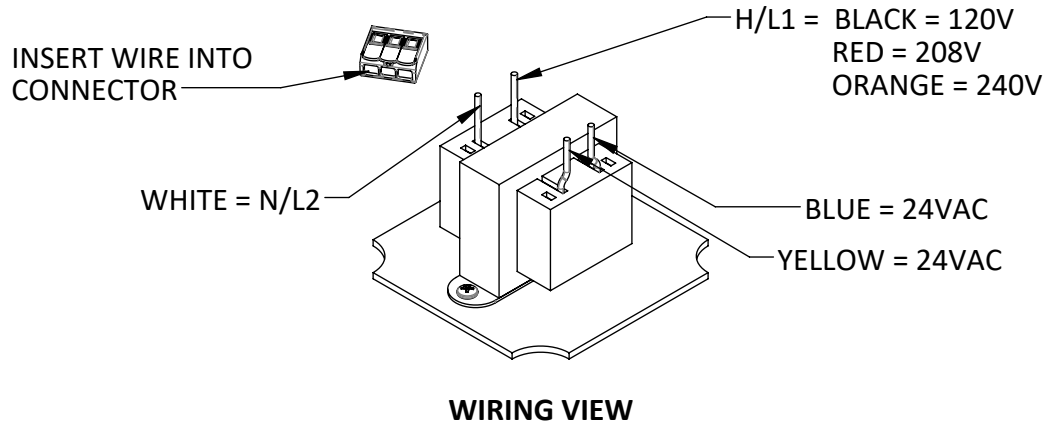

10. Close the box and turn the main power breaker back on.


WARNING! IT IS THE CUSTOMER'S RESPONSABILITY TO PROVIDE BRANCH CIRCUIT PROTECTION (CIRCUIT BREAKER OR FUSES) PER LOCAL CODE.

Parts List

Item No.	Part No.	Description	Qty
Assembly part no - 922313			
1	012902	DECAL, DANGER, HIGH VOLTAGE	1
2	922309	TRANSFORMER, 24V SEC., 40VA	1
3	922310	ENCLOSURE KIT, 5.9X5.9X3.5"	1
4	922312	WIRE LEVER NUT, 3 POS 12-24AWG	4
5	922313	CUSTOMER INST. SPRINKLER PWR	1
6	922315	SCREW, PAN, THRD CUT, 5/16-15, 3/8"	2

NOTE:

- 922313 IS NOT SHOWN ON THE DRAWING.

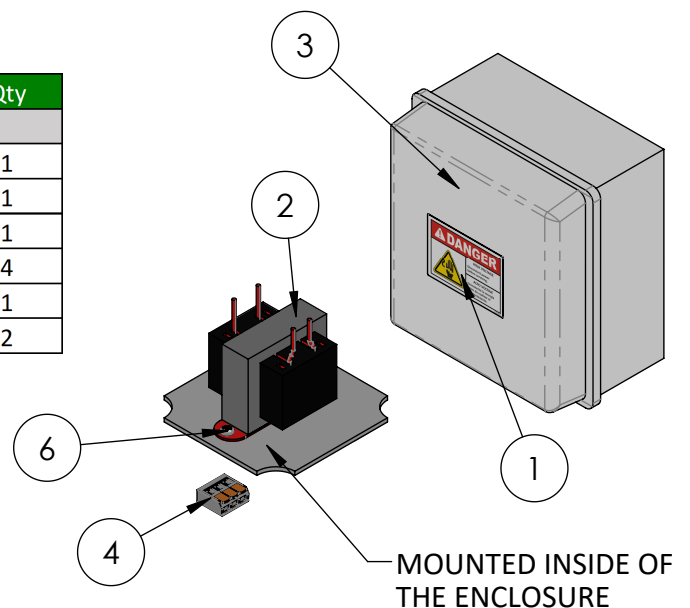

North America:

Phone: 800.99VALCO (800.998.2526)
Fax: 419.678.2200
Email: sales@val-co.com

922313 [C] 8/12/2025
Page 2

International:

Phone: (+1) 419.678.8731
Fax: (+1) 419.678.2200
Email: intl.sales@val-co.com