



# 36" Fiberglass Fan Grill

936175

## Installation Quick Sheet

### Introduction


Installation of the 36" grill (936244), uses a combination of hardware:

- (8) 1/4-20 x 1-1/4" flat head screws (MH90429) and (8) 1/4-20 nylock nuts (012793) are provided with the 36" fiberglass fan.
- (8) spacers (690469) and (8) pipe clamps (936193) are provided in the hardware bag (936190) that comes with the 36" grill kit (936175).

### Installation Instructions


Install the grill as shown in the detail view below.

1. Slide (8) pipe clamps onto the outer ring of the grill, centering each one between the spokes, as shown. Orient each clamp as shown in the detail view, with the tab down, facing the fan.
2. Thread each screw through a pre drilled hole in the edge of the orifice with the head inside the orifice, and then through a spacer and a clamp, securing the clamp with a nylock nut.
3. Repeat this process (8) times total to install the grill.

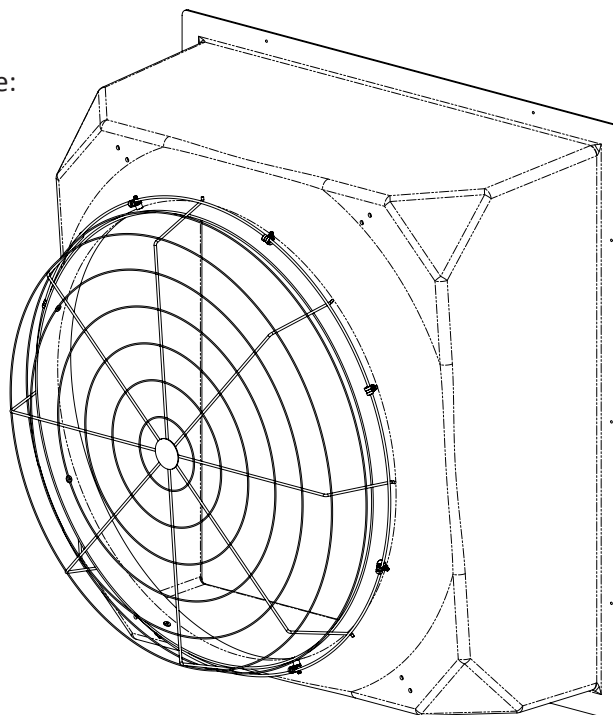

**NOTE:** It is recommended to install the grill prior to placing the fan into the rough opening.

### Detail View

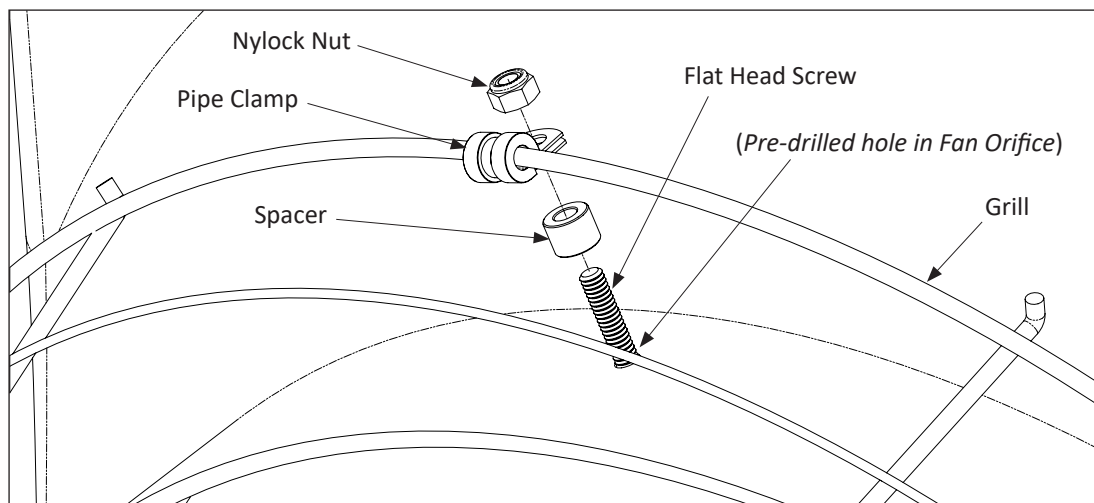

Do not install fan with moving parts within 7ft of floor or grade level without a guard that complies with OSHA Regulations. Do not use unless electrical wiring complies with all applicable codes. Do not wire without providing for power source disconnect at the fan itself. Do not service except by a qualified maintenance technician and only after disconnecting the power source. Failure to observe these precautions can result in serious injury or death.

#### North America:

Phone: 800.99VALCO; 800.998.2526

Fax: 419.678.2200

Email: [sales@val-co.com](mailto:sales@val-co.com)

©2024 Valco Industries, Inc.

990351

REV [-]

#### International:

Phone: (+1) 419.678.8731

Fax: (+1) 419.678.2200

Email: [intl.sales@val-co.com](mailto:intl.sales@val-co.com)