
Quick Sheet Instructions

REGULATOR FLUSHING KITS
RFV160, RFV160K, RFV160LK

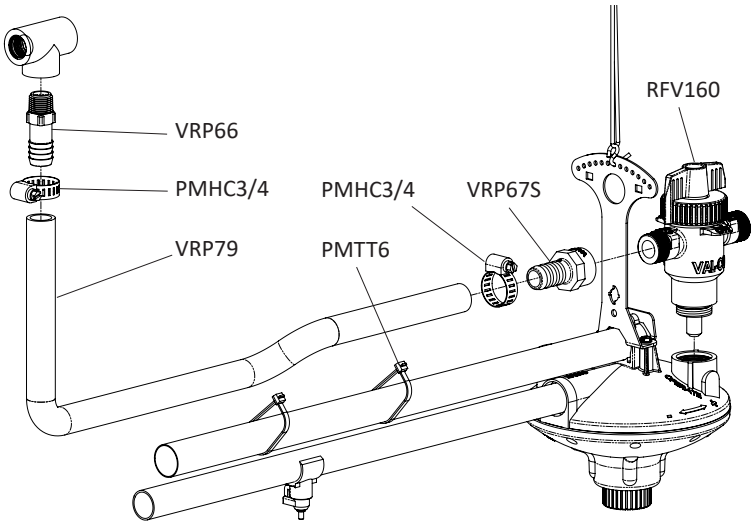


ITEM #	DESCRIPTION	QTY
RFV160K CONTENTS		
820229	HARDWARE BAG, FLUSHING INTAKE	1
RFV160	REGULATOR, FLUSHING INTAKE	1
RFV160LK CONTENTS		
820229	HARDWARE BAG, FLUSHING INTAKE	1
RFV160L	REGULATOR, FLUSHING INTAKE, LOW PRESSURE	1
820229 CONTENTS		
PMHC3/4	3/4" TRIDON HOSE CLAMP	2
PMTT6	WIRE TIE, 7.5" BLACK UV.	2
VRP66	3/4" BARB X 1/2" MALE NPT STRAIGHT FITTING	1
VRP67S	3/4" BARB X FEMALE 3/4" NPT	1
RFV160 or RFV160L COMPONENTS		
RFV150	FLUSHING INTAKE HOUSING	1
RFV151	FLUSHING INTAKE CAP	1
RFV152	FLUSHING INTAKE HANDLE	1
RFV153S	FLUSHING INTAKE SHAFT, HIGH PRESSURE (RFV160)	1
RFV153L	FLUSHING INTAKE SHAFT, LOW PRESSURE (RFV160L)	1
RFV154	LARGE O-RING FOR RFV153 (S or L)	2
RFV155	SMALL O-RING FOR RFV153 (S or L)	2
VO145S	O-RING, SPECIAL, EPDM, 70D	1
VRP14	#8-16 X 1/2" PHILIPS RH SCREW	1

Ask your Val-Co® sales representative about our automatic flush option


FLUSHING PROCEDURE

Turn the knob to the "FLUSH" position. When finished, turn knob back to "REG" to regulate.


NOTE: Do not leave regulator in flush position for more than an hour and remember to return the standpipe pressure to about 3" after growout to reduce wear on the diaphragm.

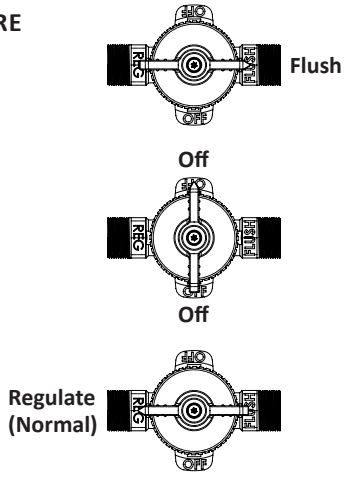

O-RING PLACEMENT

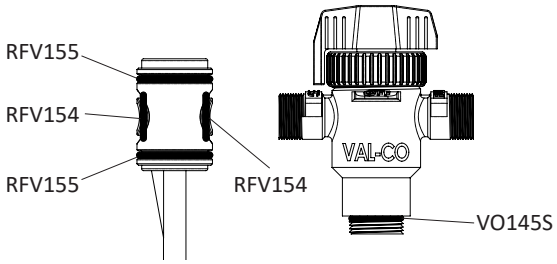

HIGH PRESSURE REGULATOR FLUSHING KIT - PARTS

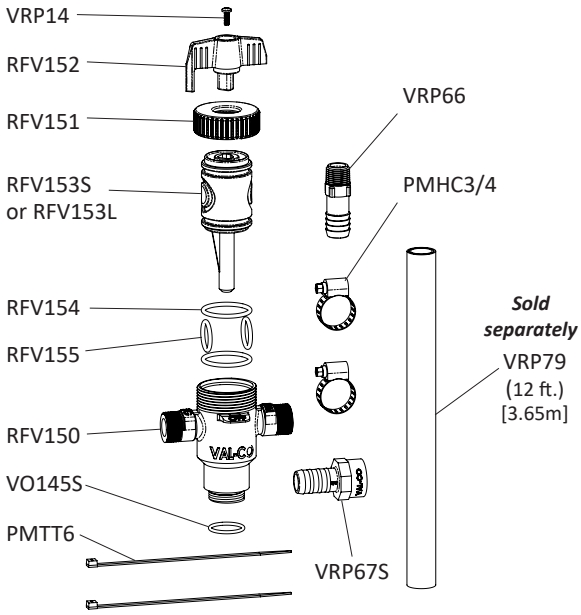

North America:
Phone: 800.99VALCO; 800.998.2526
Fax: 419.678.2200
Email: sales@val-co.com

©2026 Valco Industries, Inc.

990009
REV [G]

International:
Phone: (+1) 419.678.8731
Fax: (+1) 419.678.2200
Email: intl.sales@val-co.com