




North America:
 Phone: 800.99VALCO (800.998.2526)
 Fax: 419.678.2200
 Email: sales@val-co.com

International:
 Phone: (+1) 419.678.8731
 Fax: (+1) 419.678.2200
 Email: intl.sales@val-co.com


Quick Sheet Instructions

Big Tom Turkey Drinker VBT185L & VBT185LAL

990007
 TRC REV (2) 4-3-2018

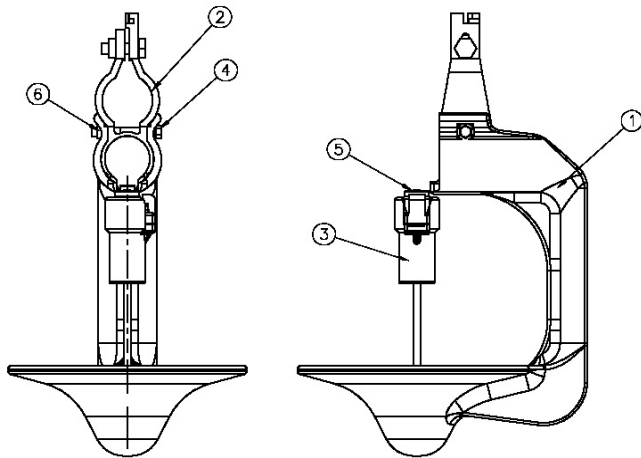


KEY	PART #	DESCRIPTION	QTY
VT185L PARTS LIST			
1	VT185L	Large Turkey Cup	1
2	VH340	Hanger Bracket W/Nut & Bolt (1.163 OD)	1
3	VT186	Turkey Pin Stop	1
4	VT185SCREWLG	Hexagon Flange Bolt	1
5	VT150XLP	Drinker with XL Pin	1
6	VT185NUT	Nut for Turkey Cup	1

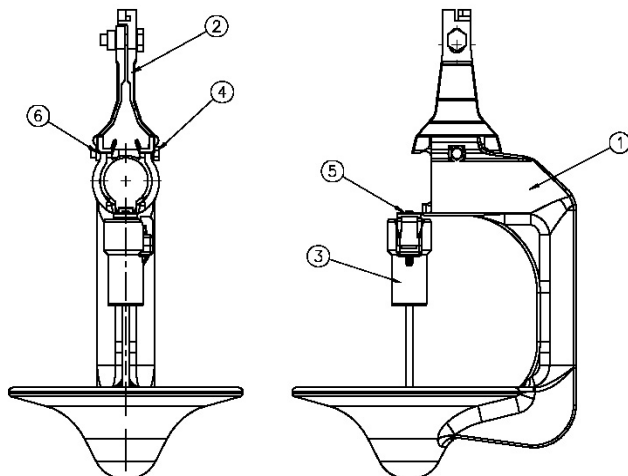

KEY	PART #	DESCRIPTION	QTY
VT185LAL PARTS LIST			
1	VT185L	Large Turkey Cup	1
2	VH340AL	Hanger Bracket for AL Extrusion W/Nut & Bolt	1
3	VT186	Turkey Pin Stop	1
4	VT185SCREWLG	Hexagon Flange Bolt	1
5	VT150XLP	Drinker with XL Pin	1
6	VT185NUT	Nut for Turkey Cup	1

ASSEMBLY:


1. Snap the hanger bracket (VH340 or VH340AL) on the conduit or extruded aluminum support channel and pipe next to the saddle.

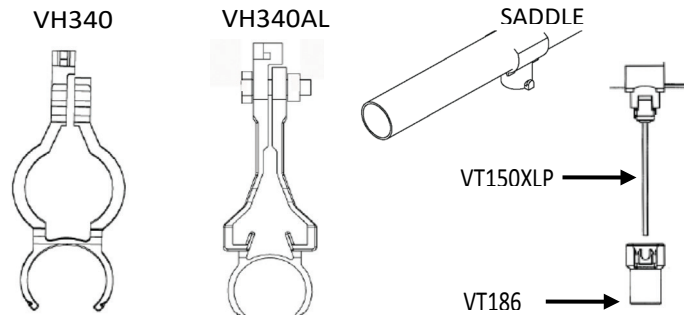


2. Insert the long pin turkey nipple (VT150XLP) upward into the saddle, then snap the pin stop (VT186) onto the nipple. (Shown above in examples on right.)

NOTE: Hook must be fully locked onto the saddle.


CLIP LOCKED



3. Snap the Big Tom turkey cup (VT185L) onto the water pipe and then slide the cup onto the hanger bracket.

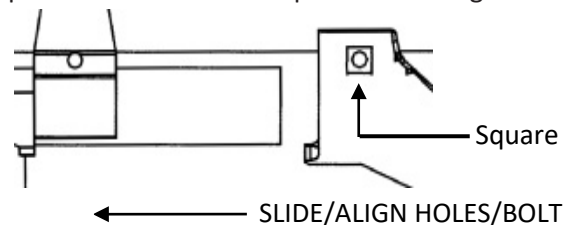

4. Place the nut (VT185NUT) into the square on the other side of the hanging bracket, then align holes and push the bolt (VT185SCREWLG) through and screw into the nut and tighten as shown above.

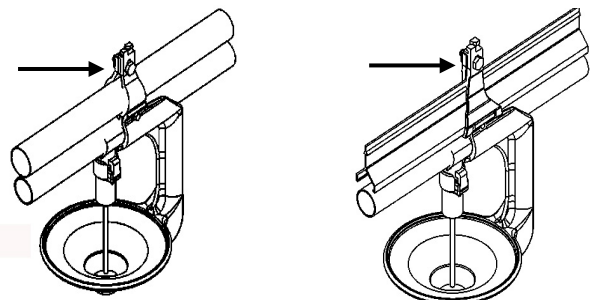

5. Tighten the hanger bracket bolt as shown above.